




Roskamp Series 6½ All-Purpose Roller Mill

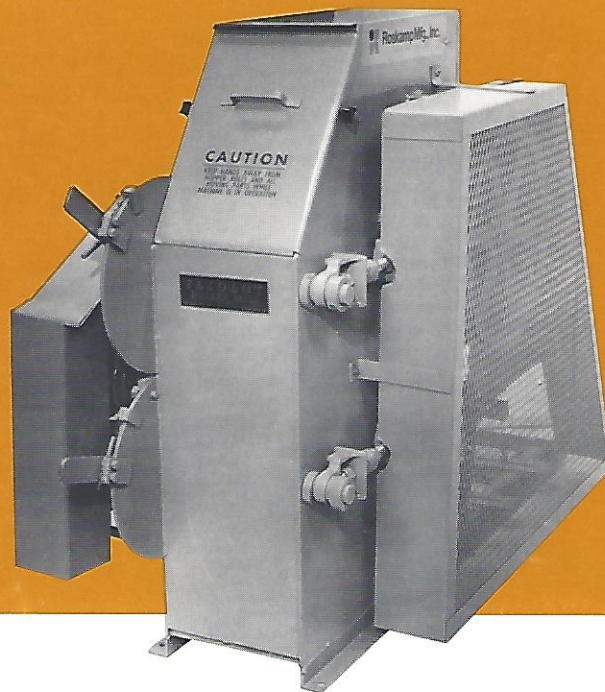


A versatile, durable roller mill with two sets of solid white iron rolls.

All of your low-capacity feed processing requirements can now be rolled by one economical machine: a Roskamp Series 6½ All-Purpose Roller Mill.

The top rolls in this mill have coarse grooves for cracking corn; the bottom rolls have fine grooves for cracking sorghum or crimping oats, barley and wheat. Use both pairs together for fine corn reduction.

It's perfect for small operations that need to be versatile.

Features include: **Solid White Iron Rolls** — the most durable on the market; hard all the way to the shaft. **Quick Change Roll Adjustment** — which maintains exact spacing between rolls for most precise rolling capability. **Compression Coil Springs** — which protect rolls, bearings and shafts from shock of foreign material. **Magnets** — which remove tramp iron from grain.

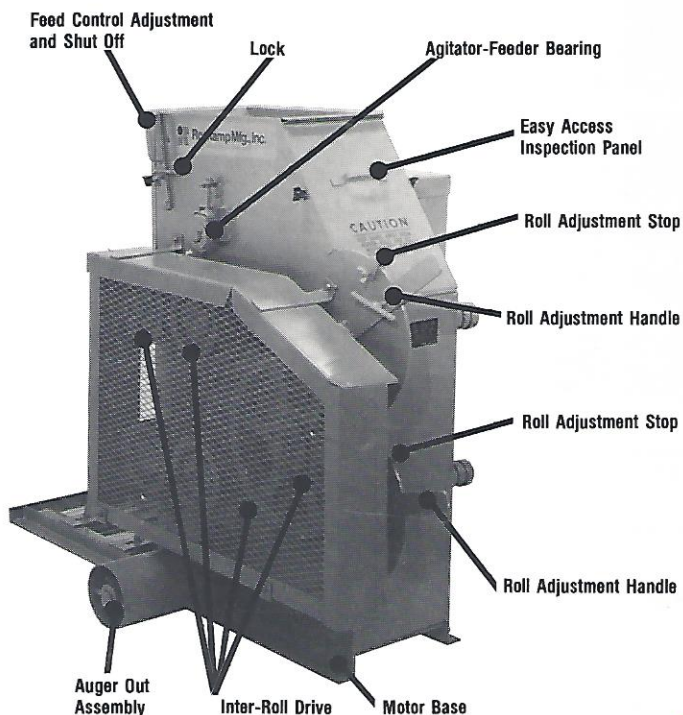

Series 6½ All-Purpose Roller Mill

Specifications

6 x 6

6½ x 9

6½ x 14

Rolls (6" diameter)	6" long		
Rolls (6½" diameter)		9" long	14" long
Weight	640#	730#	885#
Hopper Opening	6¼ x 15	9¼" x 15"	14¼" x 15"
Height (with discharge auger)	38"	38"	38"
Width (Overall)	23½"	26½"	31½"
Width at Base	10"	13"	18"
Depth (Overall)	57"	57"	57"
Depth at Base (including motor mount)	47"	47"	47"
Motor Required	3 HP	5 HP	7½ HP
Recommended R.P.M.	400-500	400-500	400-500

Rolling Capacities

Roll Size	Recommended Motor HP	Gr./In.	Hi-Moisture Corn *(70#/bu.)		Dry Corn *(56#/bu.)		Milo *(56#/bu.)		Wheat *(60#/bu.)		Oats *(37#/bu.)		Barley *(50#/bu.)	
			bu/hr #/min.		bu/hr #/min.		bu/hr #/min.		bu/hr #/min.		bu/hr #/min.		bu/hr #/min.	
6 x 6	5	4½	150	175	165	154								
		11	53	62	66	62	80	74	33	33	40	25	33	28
		13	46	54	60	56	60	56	27	27	30	18	27	23
6½ x 9	5	4½	230	268	250	230								
		10	100	116	120	110	120	110	50	50	60	35	50	40
		13	70	81	90	85	90	85	40	40	50	30	40	30
6½ x 14	7	4½	360	420	450	420								
		10	155	178	186	171	186	171	77	77	92	54	77	62
		13	110	128	140	130	140	130	75	75	75	45	75	65

NOTE: Capacities will vary according to quality of grain and sharpness of corrugations.

*Basic weights

SALES AND SERVICE

Roskamp Mfg., Inc.

616 Grand Blvd.
Cedar Falls, Iowa 50613
Phone 319/266-1792



Litho in U.S.A.

AP6½-81-MP5M